

The optical properties of Dopamine-TiO₂ submicronic sized particles

Ivan Dugandžić¹, Dragana Jovanović², Lidija Mančić¹, Zoran Šaponjić², Jovan Nedeljković², Olivera Milošević¹


¹ Institute of Technical Sciences of SASA, Knez Mihailova 35/IV, 11000, Belgrade, Serbia

² Vinča Institute of Nuclear Sciences, University of Belgrade, P.O. Box 522, 11001 Belgrade, Serbia




ABSTRACT

This work focuses on studying the formation of charge transfer complex, between TiO₂ surface and dopamine, that induced significant red-shift of optical absorption in comparison to unmodified TiO₂ particles. The submicron sized dopamine modified TiO₂ particles were obtained by means of low temperature aerosol synthesis using two different precursor solutions: unmodified colloid TiO₂ and the surface modified colloidal TiO₂ solution with dopamine. The obtained particles from first one were additionally modified by dopamine after completing the synthesis procedure. Transmission and Scanning Electron Microscopy show that particles obtained through both procedures have diameter of approximately 440 nm and contain small primary building units. Their surface structure and optical properties were analyzed using Fourier Transform Infrared and UV-Vis spectroscopy investigations.




Colloidal solution of TiO₂ NPs and DA-TiO₂ NPs and their optical properties

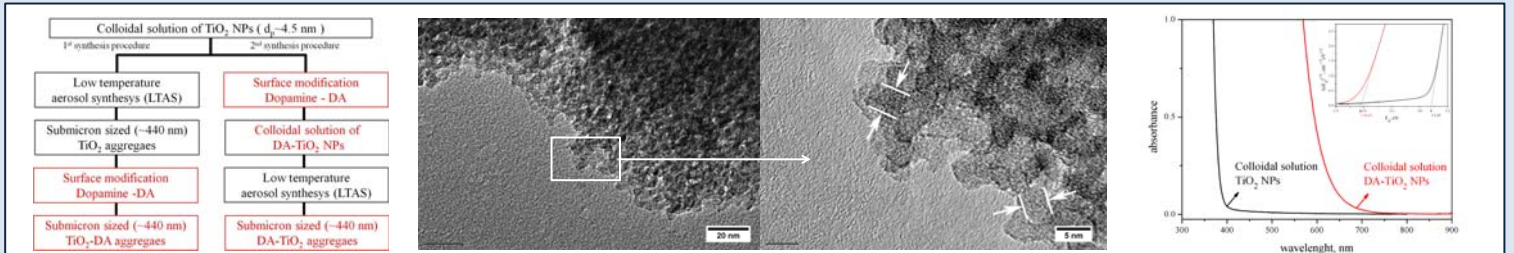

Submicron sized TiO₂-DA aggregates

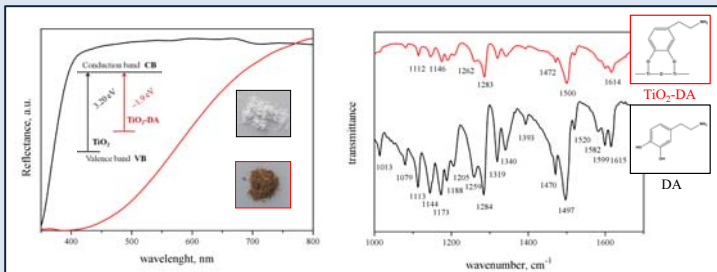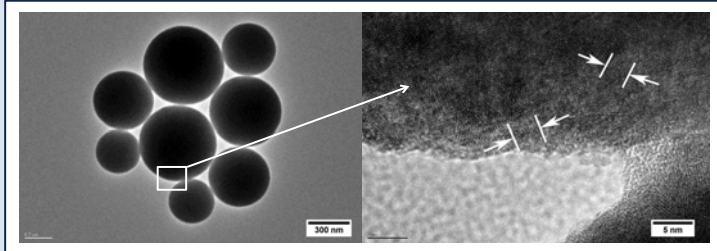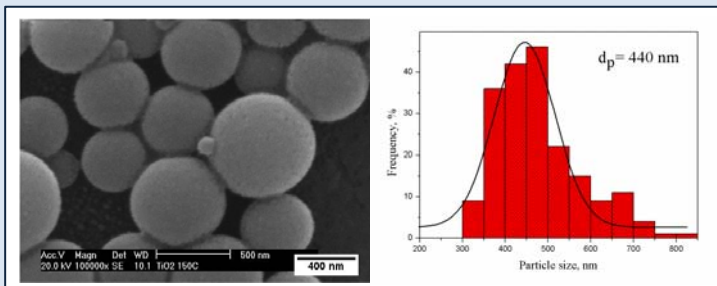

Submicron sized DA-TiO₂ aggregates

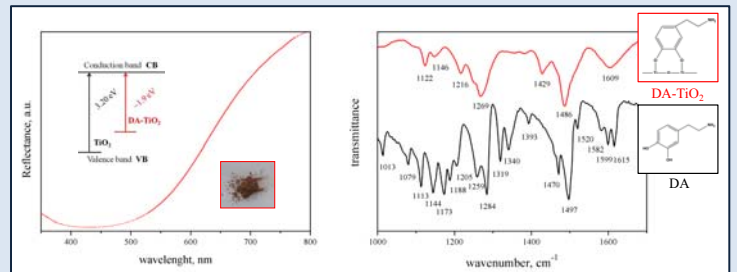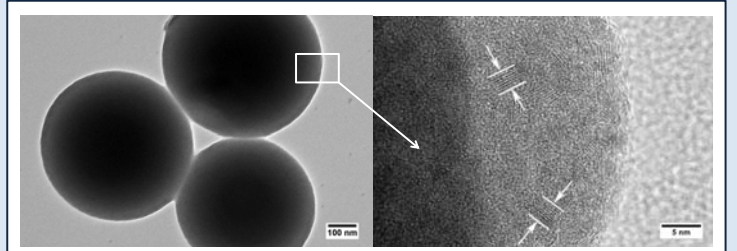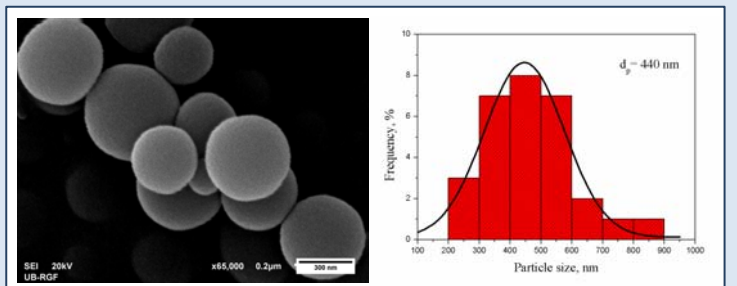

CONCLUSION

In conclusion, we proposed two different procedures for the synthesis of submicron-sized DA-TiO₂ aggregates for visible light absorption. Both of them are simple, reproducible and easy for scaling-up. Obtained aggregates have bi-functional properties: large surface area due to the nano-substructure and size comparable to the wave length of visible light, which is essential for effective light scattering. This novel nano-structured material might be a promising candidate for further optimization of working electrode morphology and DSCs overall efficiency.

Acknowledgments: This research is financially supported through the Project No. 45020 of the Ministry of Education and Science of the Republic of Serbia
ICOM 2012, 3-6th September, Belgrade, Serbia